

INN100EA070DAD

1. General Description



GaN-on-Silicon enhancement mode high-electron-mobility-transistor (HEMT) in En-FCLGA with 3.3 mm x 3.3 mm package size.

2. Features

- GaN-on-Silicon E-mode HEMT technology
- Industry application
- Very low gate charge
- Ultra-low on resistance
- Very small footprint

3. Applications

- High frequency DC-DC converter
- High density DC/DC power module
- Synchronous rectification
- Motor driver
- Solar system MPPT & solar power optimizer

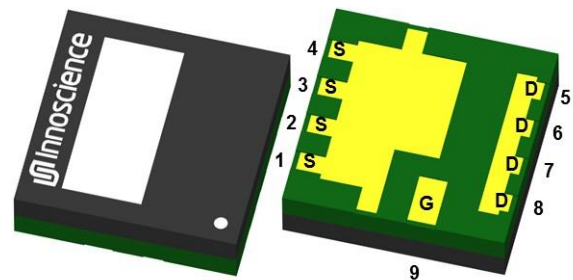

Top View

Bottom View

4. Key Performance Parameters

Table 1 Key performance parameters at $T_J = 25\text{ }^{\circ}\text{C}$

Parameter	Value	Unit
$V_{DS,max}$	100	V
$R_{DS(on),typ} @ V_{GS} = 5\text{ V}$	5.8	m Ω
$R_{DS(on),max} @ V_{GS} = 5\text{ V}$	7.8	m Ω
$Q_{G,typ} @ V_{DS} = 50\text{ V}$	3.3	nC
$I_{DS,Pulse} (T_J = 25\text{ }^{\circ}\text{C})$	175	A
$Q_{OSS} @ V_{DS} = 50\text{ V}$	17.3	nC

5. Pin Information

Table 2 Pin information

PIN	Pin Description	Pin Function
1~4	Source	Power Source
5~8	Drain	Power Drain
9	Gate	Driver Gate

Table 3 Ordering information

Type/Ordering Code	Package	Product Code
INN100EA070DAD	En-FCLGA 3.3X3.3	J48

Table of contents

1. General Description.....1

2. Features.....1

3. Applications1

4. Key Performance Parameters1

5. Pin Information.....1

6. Maximum Ratings3

7. Thermal Characteristics4

8. Electric Characteristics5

9. Electric Characteristics Diagrams7

10.Package Outlines13

11.Reel Information.....14

12.Land Pattern.....15

13.Revision History.....16

6. Maximum Ratings

at $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

Exceeding the maximum ratings may destroy the device. For further information, contact Innoscence sales office.

Table 4 Maximum ratings

SYMBOL	PARAMETER	MAX	UNIT
V_{DS}	Drain-to-Source Voltage	100	V
$V_{DS(tr)}$	Drain-to-Source Voltage ¹ ($V_{GS} = 0\text{ V}$, 1h total time, $T_A = T_{JMAX}$)	120	V
I_D	Continuous Current ($V_{GS} = 5\text{ V}$, $T_C = 25\text{ }^{\circ}\text{C}$, $R_{\theta JC} = 1.0\text{ }^{\circ}\text{C/W}$)	88	A
	Continuous Current ($V_{GS} = 5\text{ V}$, $T_C = 100\text{ }^{\circ}\text{C}$, $R_{\theta JC} = 1.0\text{ }^{\circ}\text{C/W}$)	56	A
	Continuous Current ($V_{GS} = 5\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, $R_{\theta JA} = 52.7\text{ }^{\circ}\text{C/W}$)	12	A
	Pulsed ($V_{GS} = 5\text{ V}$, $T_J = 25\text{ }^{\circ}\text{C}$, $T_{Pulse} = 100\text{ }\mu\text{s}$)	175	A
	Pulsed ($V_{GS} = 5\text{ V}$, $T_J = 150\text{ }^{\circ}\text{C}$, $T_{Pulse} = 100\text{ }\mu\text{s}$)	140	A
V_{GS}	Gate-to-Source Voltage	6	V
	Gate-to-Source Voltage	-4	V
$V_{GS(tr)}$	Gate-to-Source Voltage ¹ ($V_{DS} = 0\text{ V}$, 168h total time, $T_A = T_{JMAX}$)	6.5	V
P_{tot}	Power Dissipation ($V_{GS} = 5\text{ V}$, $T_C = 25\text{ }^{\circ}\text{C}$, $R_{\theta JC} = 1.0\text{ }^{\circ}\text{C/W}$)	118	W
	Power Dissipation ($V_{GS} = 5\text{ V}$, $T_A = 25\text{ }^{\circ}\text{C}$, $R_{\theta JA} = 52.7\text{ }^{\circ}\text{C/W}$)	2.3	W
T_J	Operating Temperature	-40 to 150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-55 to 150	$^{\circ}\text{C}$

Note:

1. Provided as measure of robustness under abnormal operating conditions and not recommended for normal operation.

7. Thermal Characteristics

Table 5 Thermal characteristics

SYMBOL	PARAMETER	TYP	UNIT	Note/Test Condition
$R_{\theta JC}$	Thermal Resistance, Junction to Case	1.0	°C/W	-
$R_{\theta JB}$	Thermal Resistance, Junction to Board	9.7	°C/W	-
$R_{\theta JA}$	Thermal Resistance, Junction to Ambient ²	52.7	°C/W	-
T_{sld}	Maximum Reflow Soldering Temperature	260	°C	MSL3

Note:

- $R_{\theta JA}$ is determined with the device on FR4 PCB (2s2p with thermal vias) defined in accordance with JEDEC standards. PCB is mounted in horizontal position without air stream cooling.

8. Electric Characteristics

at $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

Table 6 Static characteristics

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT	TEST CONDITIONS
I_{DSS}	Drain Source Leakage	-	0.5	43	μA	$V_{GS} = 0\text{ V}$, $V_{DS} = 100\text{ V}$
	Drain Source Leakage ($T_J = 125\text{ }^{\circ}\text{C}$)	-	100	-	μA	$V_{GS} = 0\text{ V}$, $V_{DS} = 100\text{ V}$
I_{GSS}	Gate-to-Source Forward Leakage	-	0.2	43	μA	$V_{GS} = 6\text{ V}$
	Gate-to-Source Forward Leakage ($T_J = 125\text{ }^{\circ}\text{C}$)	-	20	-	μA	$V_{GS} = 6\text{ V}$
	Gate-to-Source Reverse Leakage	-	0.1	43	μA	$V_{GS} = -4\text{ V}$
$V_{GS(TH)}$	Gate Threshold Voltage ³	0.8	1.1	2.1	V	$V_{DS} = V_{GS}$, $I_D = 3.2\text{ mA}$
$R_{DS(on)}$	Drain-Source On-state Resistance ³	-	5.8	7.8	$\text{m}\Omega$	$V_{GS} = 5\text{ V}$, $I_D = 2.5\text{ A}$
V_{SD}	Source-Drain Forward Voltage	-	2.3	-	V	$I_S = 16\text{ A}$, $V_{GS} = 0\text{ V}$

Note:

3. $V_{GS(TH)}$ and $R_{DS(on)}$ is measured without prior drain bias or switching stress.

Table 7 Dynamic characteristics ⁴

SYMBOL	PARAMETER	MIN	TYP	MAX	UNIT	TEST CONDITIONS
C _{ISS}	Input Capacitance	-	402	-	pF	V _{GS} = 0 V, V _{DS} = 50 V
C _{OSS}	Output Capacitance	-	172	-		V _{GS} = 0 V, V _{DS} = 50 V
C _{RSS}	Reverse Transfer Capacitance	-	2.6	-		V _{GS} = 0 V, V _{DS} = 50 V
C _{OSS(ER)}	Energy Related C _{OSS}	-	242	-		V _{GS} = 0 V, V _{DS} = 0 V to 50 V
C _{OSS(TR)}	Time Related C _{OSS}	-	346	-		V _{GS} = 0 V, V _{DS} = 0 V to 50 V
R _G	Gate Resistance	-	1.1	-	Ω	f = 5 MHz, open drain
Q _G	Total Gate Charge	-	3.3	-	nC	V _{GS} = 5 V, V _{DS} = 0 V to 50 V, I _D = 16 A
Q _{GS}	Gate to Source Charge	-	0.8	-		V _{GS} = 5 V, V _{DS} = 0 V to 50 V, I _D = 16 A
Q _{GD}	Gate to Drain Charge	-	0.5	-		V _{GS} = 5 V, V _{DS} = 0 V to 50 V, I _D = 16 A
V _{Plat}	Gate Plateau Voltage	-	2.0	-	V	I _D = 16 A, V _{DS} = 50 V, V _{GS} = 0 V to 5 V
Q _{G(TH)}	Gate Charge at Threshold	-	0.5	-	nC	V _{GS} = 5 V, V _{DS} = 0 V to 50 V, I _D = 16 A
Q _{OSS}	Output Charge	-	17.3	-		V _{GS} = 0 V, V _{DS} = 0 V to 50 V
Q _{RR}	Reverse Recovery Charge	-	0	-		V _{DS} = 50 V, I _S = 16 A

Note:

4. Guaranteed by design.

9. Electric Characteristics Diagrams

at $T_J = 25\text{ }^{\circ}\text{C}$ unless otherwise specified.

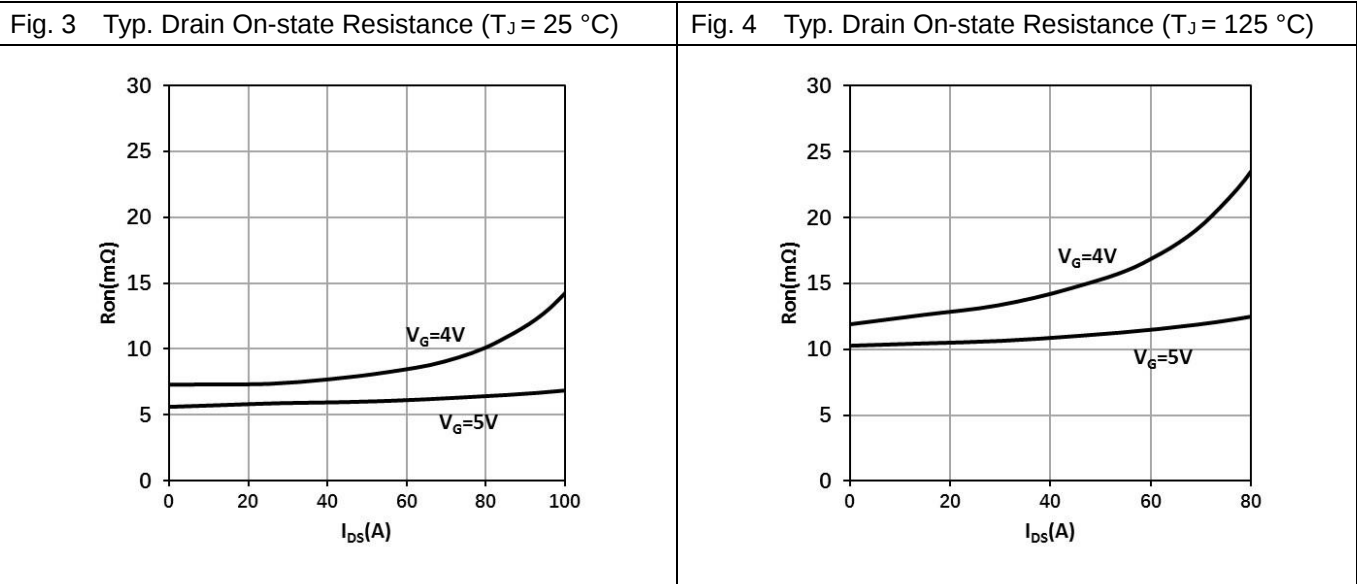
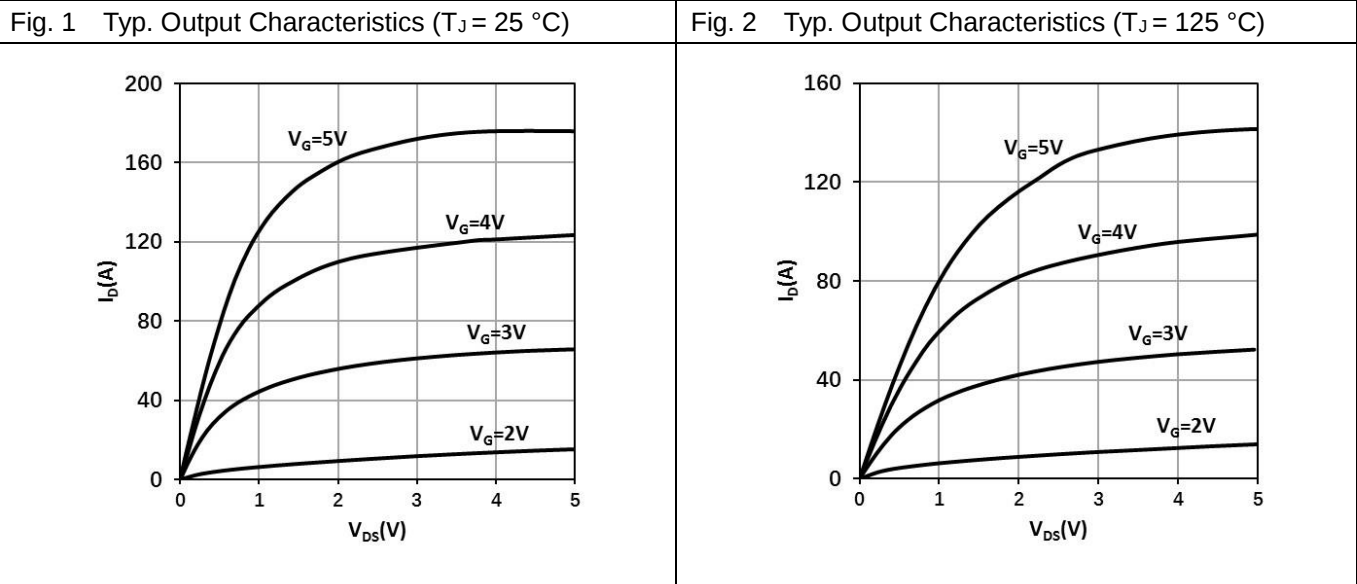


Fig. 5 Normalized On-State Resistance vs. Temp.

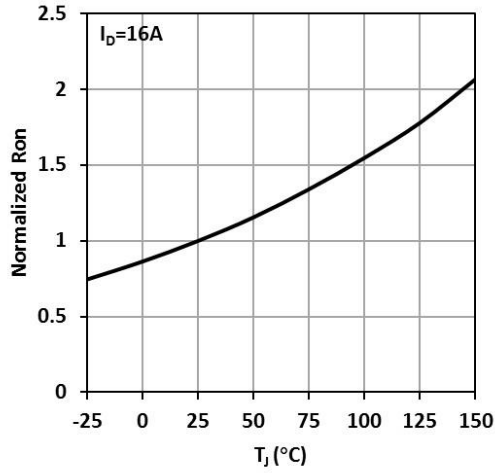


Fig. 6 Typ. Transfer Characteristics

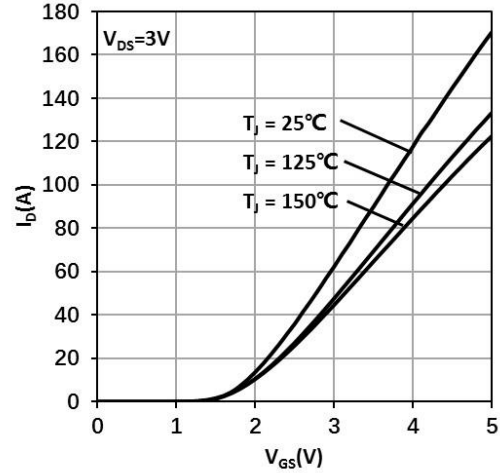


Fig. 7 Typ. Reverse Drain-Source Characteristics ($V_{GS} \leq 0$, $T_J = 25^{\circ}\text{C}$)

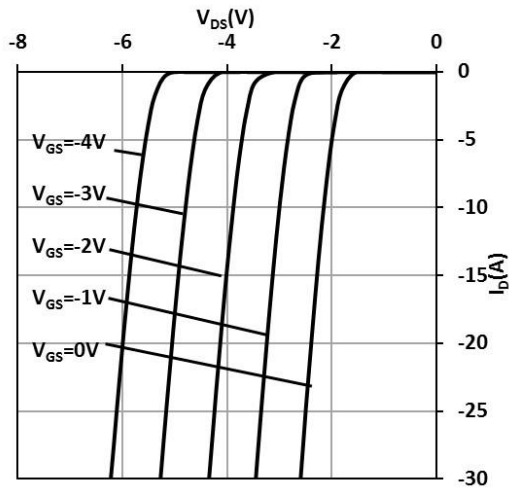


Fig. 8 Typ. Reverse Drain-Source Characteristics ($V_{GS} \geq 0$, $T_J = 25^{\circ}\text{C}$)

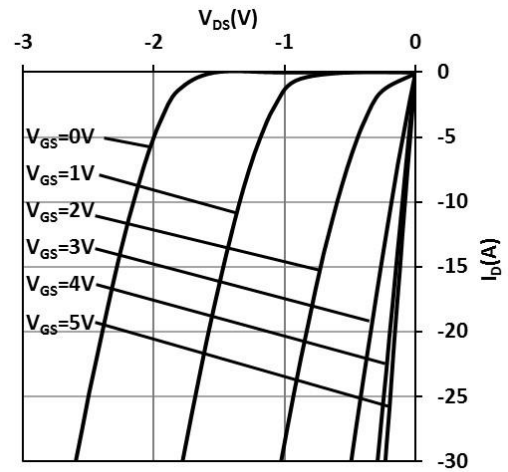


Fig. 9 Typ. Reverse Drain-Source Characteristics
($V_{GS} \leq 0$, $T_J = 125^\circ\text{C}$)

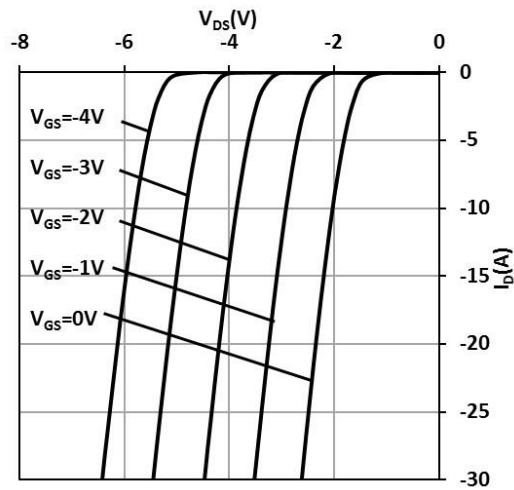


Fig. 10 Typ. Reverse Drain-Source Characteristics
($V_{GS} \geq 0$, $T_J = 125^\circ\text{C}$)

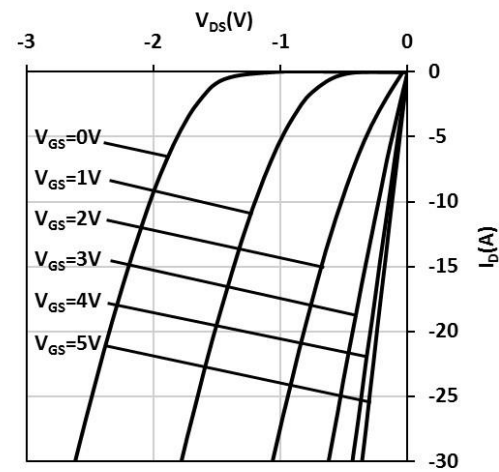


Fig. 11 Typ. Capacitances Characteristics

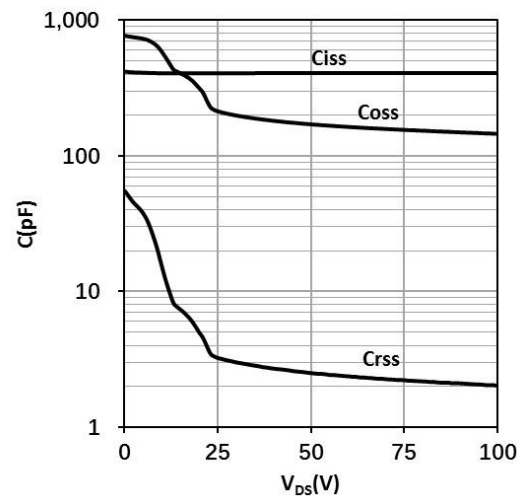


Fig. 12 Typ. Gate Charge

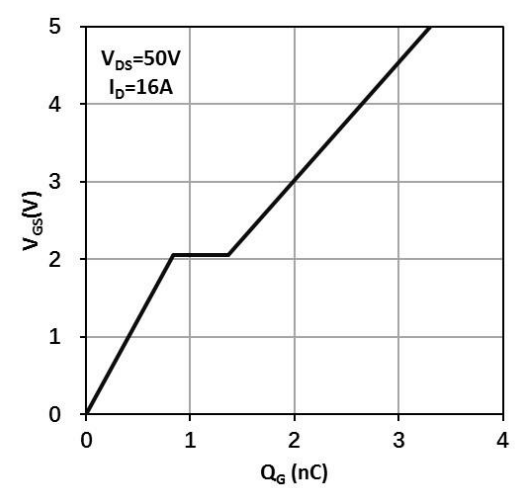


Fig. 13 Normalized Threshold Voltage vs. Temp.

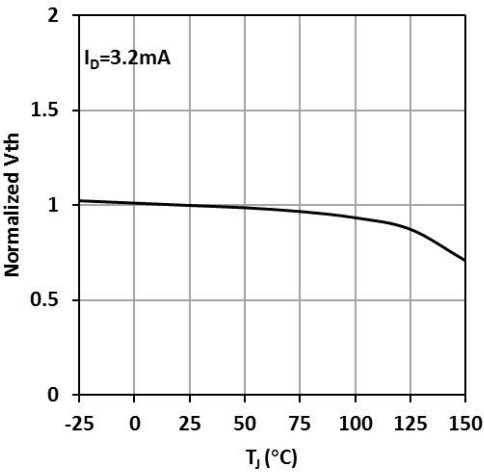


Fig. 14 Typ. Output Charge

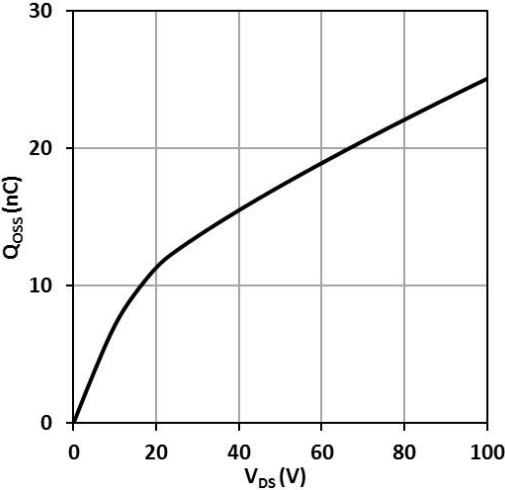


Fig. 15 Typ. Output Capacitance Stored Energy

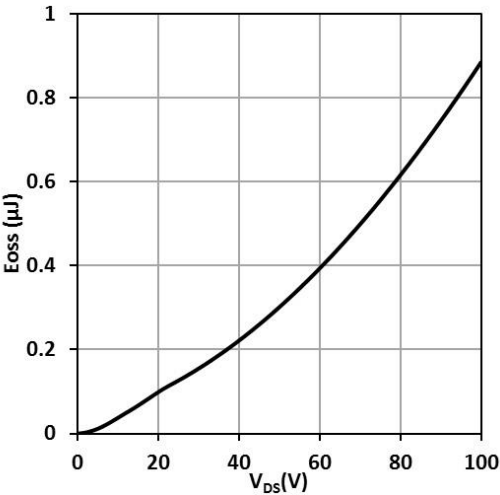


Fig. 16 Power Dissipation P_{tot} = f(T_c), R_{θJC} = 1.0 °C/W

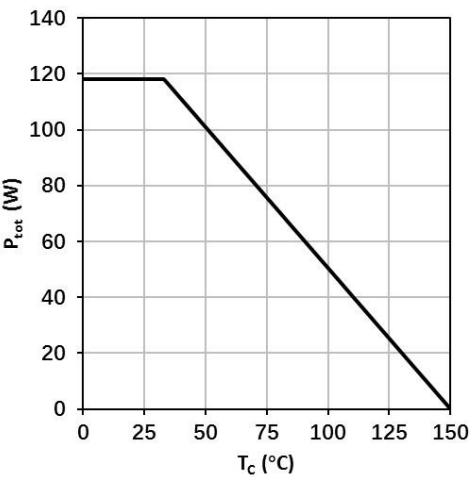


Fig. 17 Power Dissipation $P_{tot} = f(T_A)$, $R_{\theta JA} = 52.7\text{ }^{\circ}\text{C/W}$

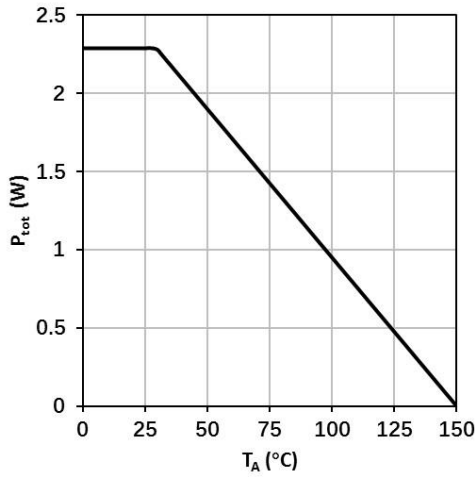


Fig. 18 Typ. Gate-to-Source Leakage Characteristics $I_G = f(V_{GS})$; Drain Open

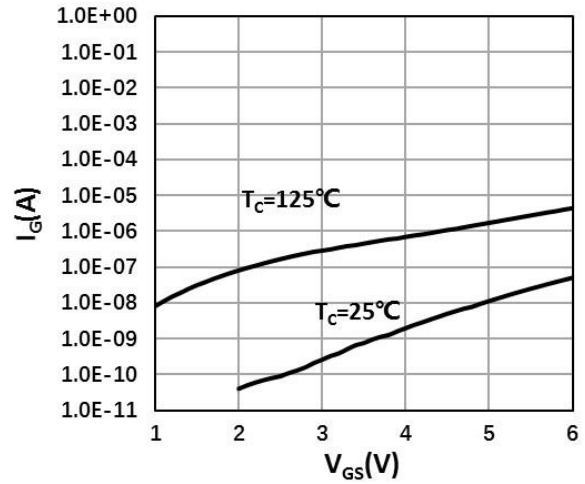


Fig. 19 Typ. Drain-source Leakage Characteristics $I_{DSS} = f(V_{DS})$; $V_{GS} = 0\text{ V}$



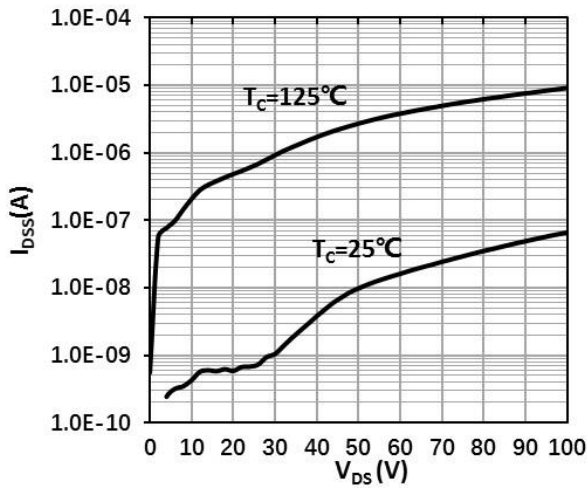



Fig. 20 Safe Operating Area $I_D = f(V_{DS})$; $T_c = 25\text{ }^{\circ}\text{C}$; single pulse; parameter: t_p

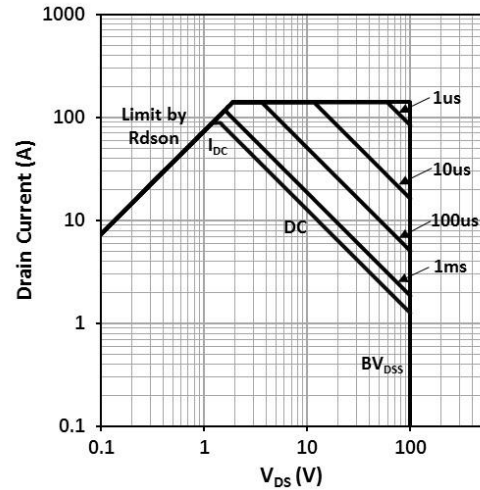

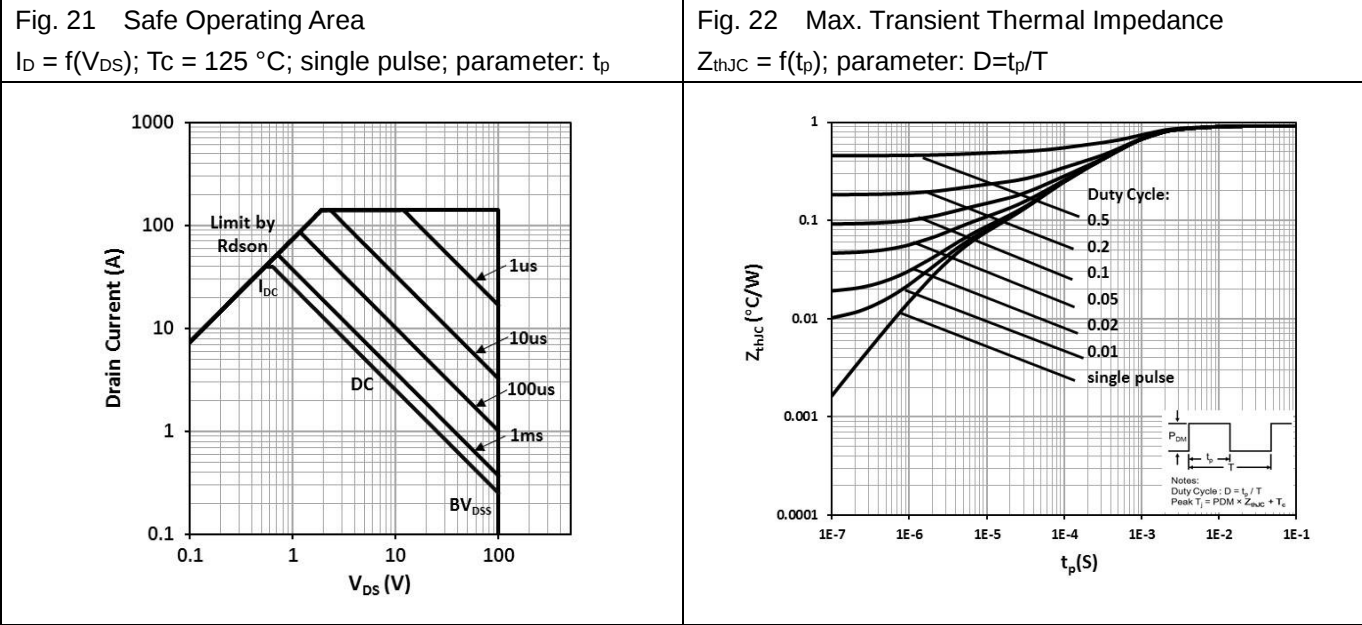


10. Package Outlines

Package Reference

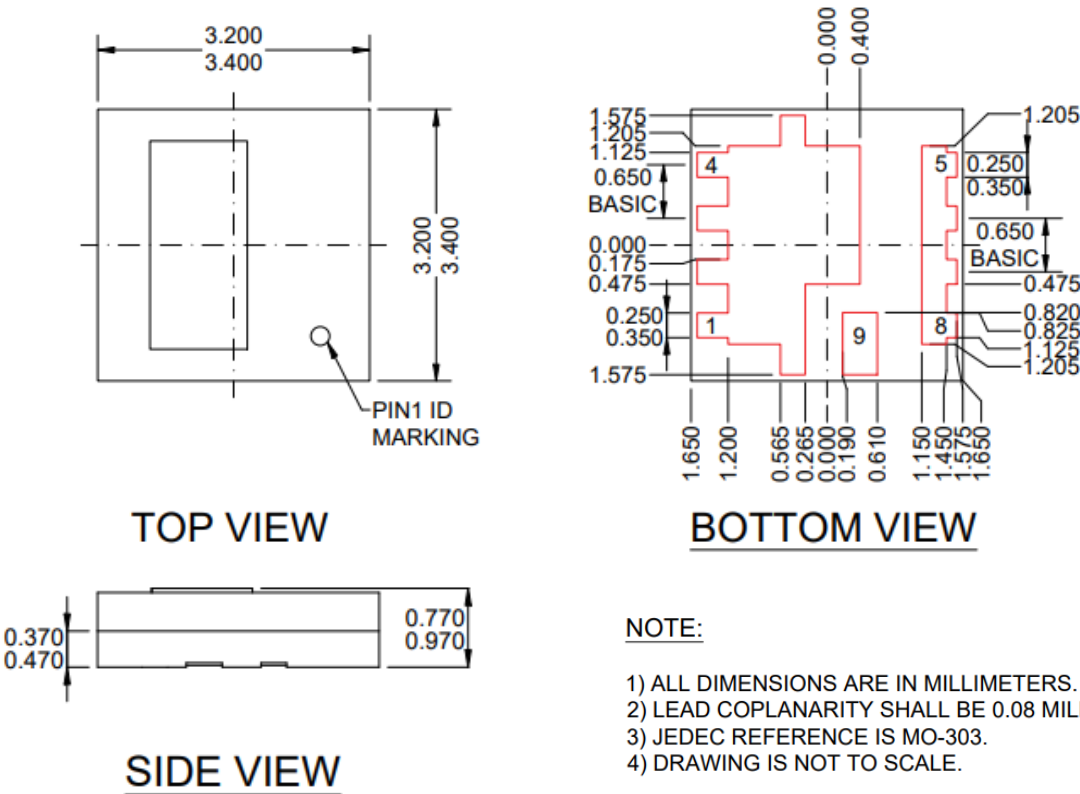


Pin Configuration

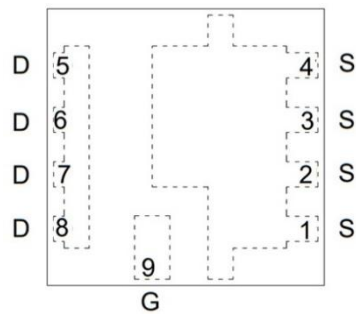

TOP VIEW


Marking Reference



TOP VIEW



Row	Description	Example
Row1	Company Name	INN
Row2	Product Code	XXX
Row3	Lot Code	XXX
Row4		XXX
Row5	Date Code	YY
Row6		WW

11. Reel Information

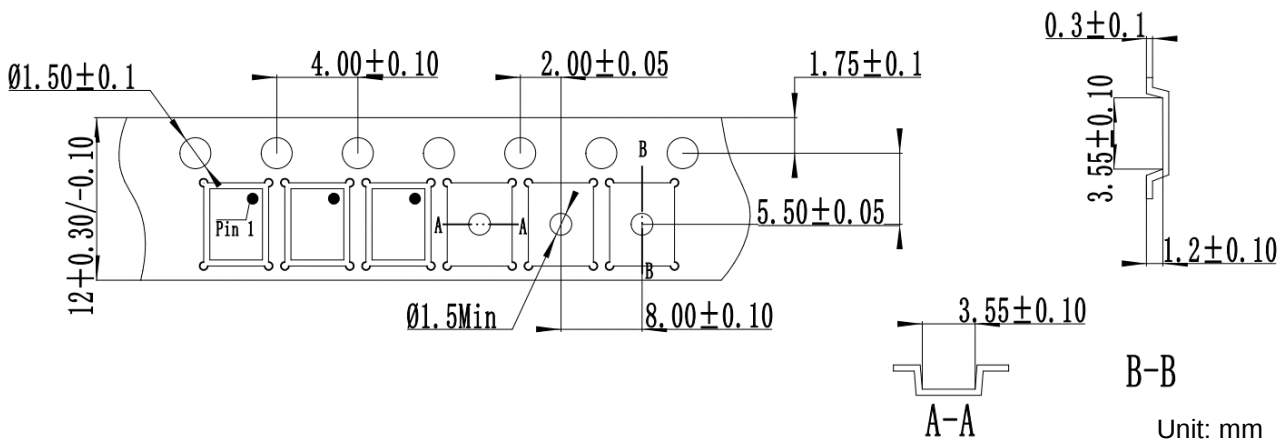

Notes:

- (1) The cumulative error of any 10 sprocket holes shall not exceed $\pm 0.20\text{mm}$;
- (2) The material thickness shall be measured based on the edge of the carrier tape;
- (3) The unspecified tolerance is $\pm 0.1\text{mm}$, and $R<0.3\text{mm}$ is not specified;
- (4) The unmarked demolding slope is 5° ;
- (5) Surface Resistivity: $1 \times 10^5 \Omega/\Delta \sim 1 \times 10^{11} \Omega/\Delta$

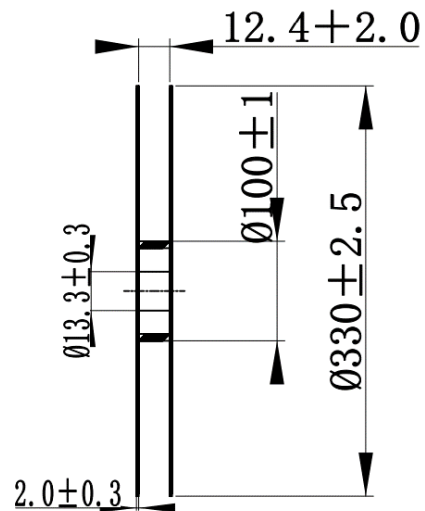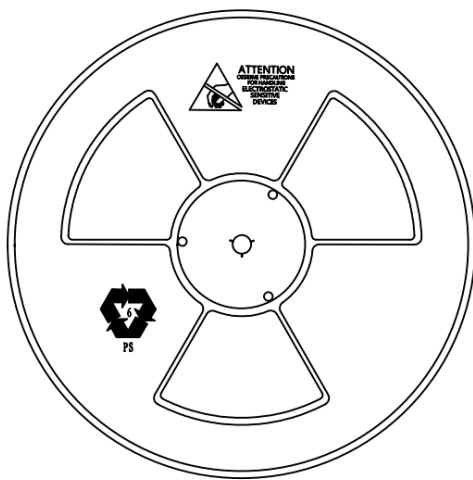


Notes:


1. The surface of the product should be smooth, clean, and free of injection molding defects, and there should be no significant burrs;
2. Material surface resistance: $1 \times 10^5 \Omega/\Delta \sim 1 \times 10^{10} \Omega/\Delta$;
3. No tolerance marked: $\pm 0.3\text{mm}$;

12. Land Pattern

Recommended Land Pattern

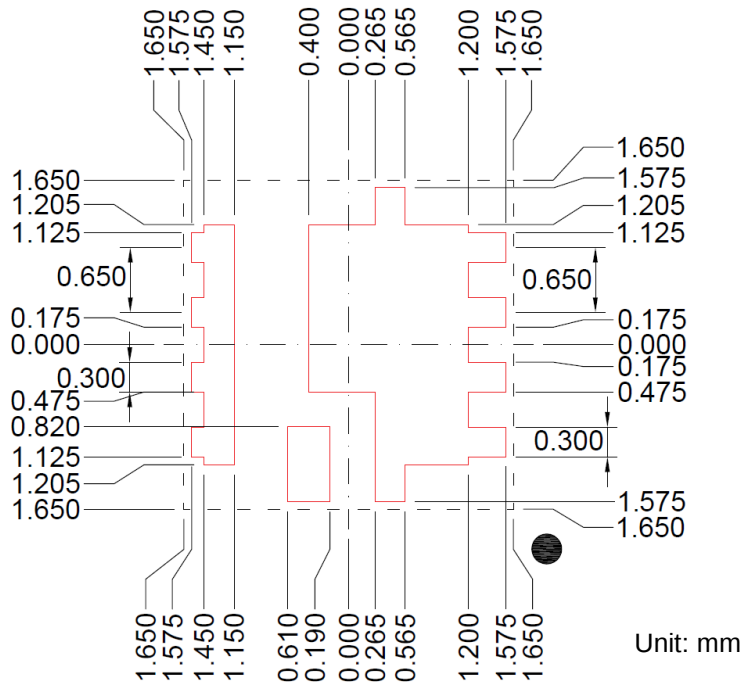

Recommended Stencil Drawing

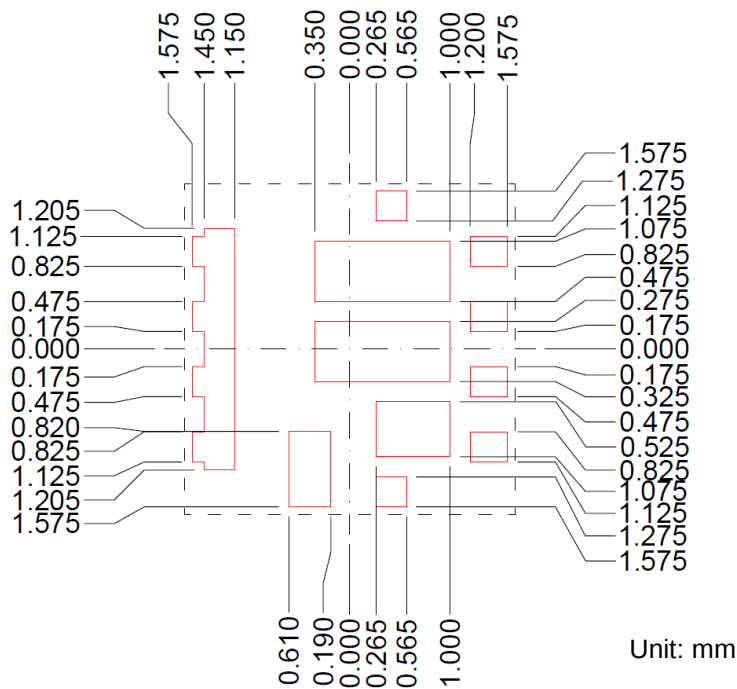

13. Revision History

Major changes since the last revision

Revision	Date	Description of changes
1.0	2025-10-15	1.0 version release

Important Notice

The information provided in this document is intended as a guide only and shall not in any event be regarded as a guarantee of conditions, characteristics or performance. Innoscience does not assume any liability arising out of the application or use of any product described herein, including but not limited to any personal injury, death, or property or environmental damage. No licenses, patent rights, or any other intellectual property rights is granted or conveyed. Innoscience reserves the right to modify without notice. All rights reserved.